


# zSignalTrans<sup>®</sup>

## IST-D Microprocessor Based Programmable Isolated Signal Transmitter

### Features :

- ▶ Programmable for various input signals, measuring range.
- ▶ Din Rail Mount
- ▶ Configurable without external Power Connected.
- ▶ Inputs :
  - Resistance thermometer (Pt100)
  - Thermocouple (J, K, T, E, B, R, S, N, C)
  - Voltage/Current transmitter (mV/V/mA)
- ▶ Output :
  - 2-wire loop-power technology, 4 to 20 mA or 20 to 4 mA analog output.
- ▶ High accuracy in total ambient temperature range.
- ▶ Fault signal on sensor break presettable.

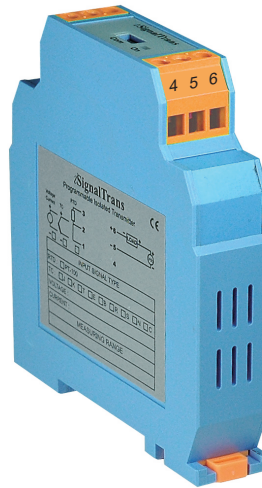

### Configuration

The zSignalTrans<sup>®</sup> IST-D transmitter is user configurable with the zSignalwin<sup>®</sup> software and interface cable URC-1020 or handheld programmer. The zSignalwin<sup>®</sup> is user-friendly software. The latest release version can be download free from website. Interface cable consist of interface converter and USB plug. It can be purchased separately from the zSignalTrans<sup>®</sup> supplier. During configuration the transmitter can work alone without connecting to a power source.

#### Specification

Specification	
Input	Thermocouple (T/C) : industry standard thermocouple types J, K, T, E, B, R, S, N, C (ITS-90).
	Pt100 : Excitation 180uA. 2 or 3 wire connection (ITS-90 $\alpha=0.00385$ ).
	Voltage : -60mVdc to 60mVdc or -10Vdc to 10Vdc.
	Current : 0-24mAdc
Accuracy	Refer to Table 1 Input Signal
A/D Resolution	16 bits
Input Sampling Rate	<200 ms
Power Supply	DC 24V
Output	Current Output : 4~20mA (Resistive load 600 $\Omega$ max )
	Continuous Voltage Output: 0~50mV; 0~10V... (Resistive load 600 $\Omega$ min)
Output Resolution	0.6 $\mu$ A (15 bits)
Output Response Time	<200 ms
Common Mode Rejection Ratio (CMRR)	>80 dB
Electromagnetic Compatibility (EMC)	En 50081-2, En 50082-2
Galvanic Isolation	3.75 KV. between input and output
Operating Temperature	-10 to 50 $^{\circ}$ C
Humidity	0 to 90% RH
Dimension	75mm(W)x87mm(H)x18.5mm(D)


Table 1 Input Signal

Input signal	Maximum Range	Accuracy
Thermocouple J	-50 to 1000 $^{\circ}$ C (-58 to 1832 $^{\circ}$ F)	$\pm 1^{\circ}$ C
Thermocouple K	-50 to 1370 $^{\circ}$ C (-58 to 2498 $^{\circ}$ F)	$\pm 1^{\circ}$ C
Thermocouple T	-270 to 400 $^{\circ}$ C (-454 to 752 $^{\circ}$ F)	$\pm 1^{\circ}$ C
Thermocouple E	-50 to 700 $^{\circ}$ C (-58 to 1292 $^{\circ}$ F)	$\pm 1^{\circ}$ C
Thermocouple B	0 to 1750 $^{\circ}$ C (32 to 3182 $^{\circ}$ F)	$\pm 2^{\circ}$ C (Note 1)
Thermocouple R	-50 to 1750 $^{\circ}$ C (-58 to 3182 $^{\circ}$ F)	$\pm 2^{\circ}$ C
Thermocouple S	-50 to 1750 $^{\circ}$ C (-58 to 3182 $^{\circ}$ F)	$\pm 2^{\circ}$ C
Thermocouple N	-50 to 1300 $^{\circ}$ C (-58 to 2372 $^{\circ}$ F)	$\pm 2^{\circ}$ C
Thermocouple C	-50 to 1800 $^{\circ}$ C (-58 to 3272 $^{\circ}$ F)	$\pm 2^{\circ}$ C
Pt 100	-200 to 600 $^{\circ}$ C (-328 to 1112 $^{\circ}$ F)	$\pm 0.2^{\circ}$ C
mV	-60mV to 60mV	$\pm 0.01$ mV
Voltage (Note2)	-10 to 10Vdc	$\pm 1$ mV
Current (Note2)	0 to 24mAdc	$\pm 10$ $\mu$ A


Note 1: Accuracy is not guaranteed between 0 and 400 $^{\circ}$ C (0 and 752 $^{\circ}$ F) for type B

Note 2: The internal DIP switch should be set

## Dimension

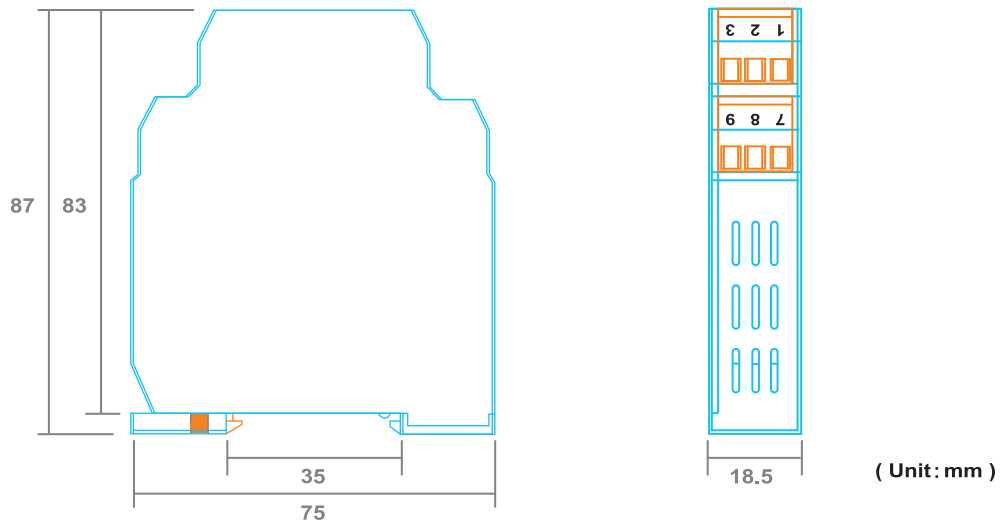

## Wiring Diagram

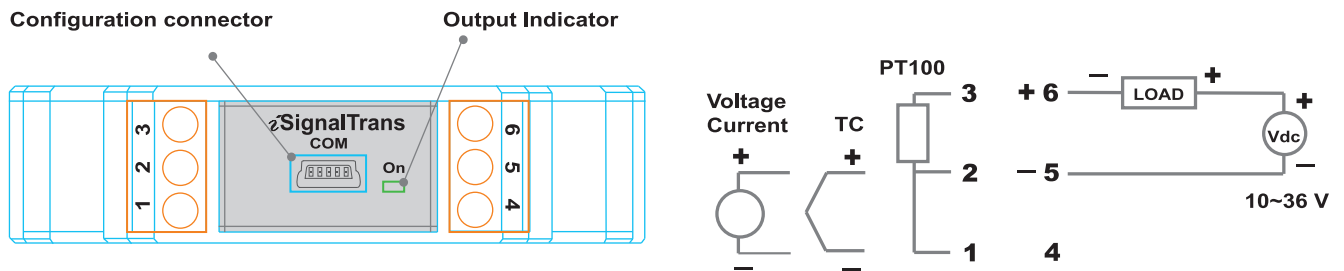


## Ordering Information

### IST-D

The unit will come standard with PT100, -200~600°C, you can change the input Type/Rang using the free software "zSignalwin®" with the configuration cable URC-1020, or you can contact us for non-standard Input/Rang setting.

### [ Accessory ]

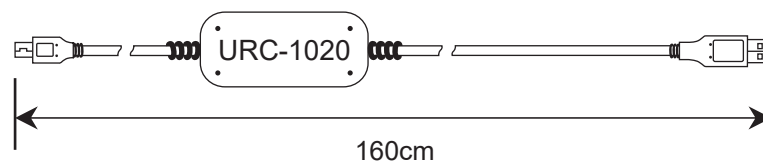

URC-1020 Interface Cable