




SignalTrans[®]

NST-H Microprocessor Based Programmable Signal Transmitter

Features :

- ▶ Programmable for various input signals, measuring range.
- ▶ Suitable to Mount Inside a KN box.
- ▶ Configurable without external Loop Power Connected.
- ▶ Inputs :
 - Resistance thermometer (Pt100)
 - Thermocouple (J,K,T,E,B,R,S,N,C)
 - mV
- ▶ Output :
 - 2-wire loop-power technology, 4 to 20 mA or 20 to 4 mA
 - analog output.
- ▶ High accuracy in total ambient temperature range.
- ▶ Fault signal on sensor break presettable.

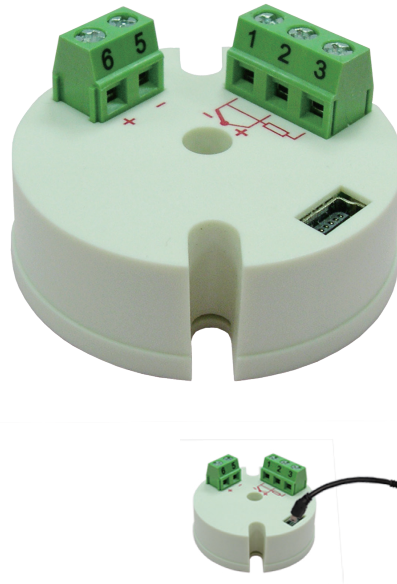

Configuration


The **SignalTrans[®]** NST-H transmitter is user configurable with the **Signalwin[®]** software and interface cable URC-1020 or handheld programmer. The **Signalwin[®]** is user-friendly software. The latest release version can be download free from website. Interface cable consist of interface converter and USB plug. It can be purchased separately from the **SignalTrans[®]** supplier. During configuration the transmitter can work alone without connecting to a power source.

Specification	
Input	Thermocouple (T/C) : industry standard thermocouple types J, K, T, E, B, R, S, N, C (ITS-90). Pt100 : Excitation 180uA. 2 or 3 wire connection (ITS-90 $\alpha = 0.00385$). Voltage : -60mVdc to 60mVdc.
Accuracy	Refer to Table 1 Input Signal
A/D Resolution	16 bits
Input Sampling Rate	<200 ms
Power Supply	DC10~36V
Max. Load	Max Load = (V-10) / 0.02 (Ω)
Output Resolution	0.6 μ A (15 bits)
Output Response Time	<200 ms
Common Mode Rejection Ratio (CMRR)	>80 dB
Electromagnetic Compatibility	En 50081-2, En 50082-2
Operating Temperature	-10 to 50°C
Humidity	0 to 90% RH

Table 1 Input Signal		
Input signal	Maximum Range	Accuracy
Thermocouple J	-50 to 1000 °C (-58 to 1832 °F)	± 1°C
Thermocouple K	-50 to 1370 °C (-58 to 2498 °F)	± 1°C
Thermocouple T	-270 to 400 °C (-454 to 752 °F)	± 1°C
Thermocouple E	-50 to 700 °C (-58 to 1292 °F)	± 1°C
Thermocouple B	0 to 1750 °C (32 to 3182 °F)	± 2°C (Note 1)
Thermocouple R	-50 to 1750 °C (-58 to 3182 °F)	± 2°C
Thermocouple S	-50 to 1750 °C (-58 to 3182 °F)	± 2°C
Thermocouple N	-50 to 1300 °C (-58 to 2372 °F)	± 2°C
Thermocouple C	-50 to 1800 °C (-58 to 3272 °F)	± 2°C
Pt 100	-200 to 600 °C (-328 to 1112 °F)	± 0.2°C
mV	-60mV to 60mV	± 0.01mV


Note 1: Accuracy is not guaranteed between 0 and 400°C (0 and 752°F) for type B

Dimension

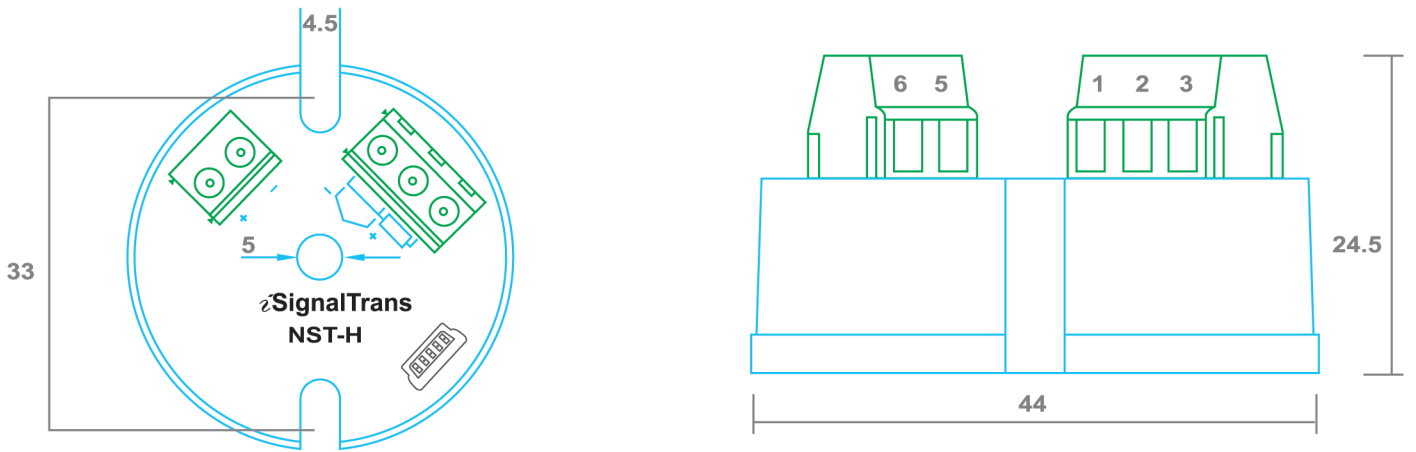

(Unit: mm)

Wiring Diagram

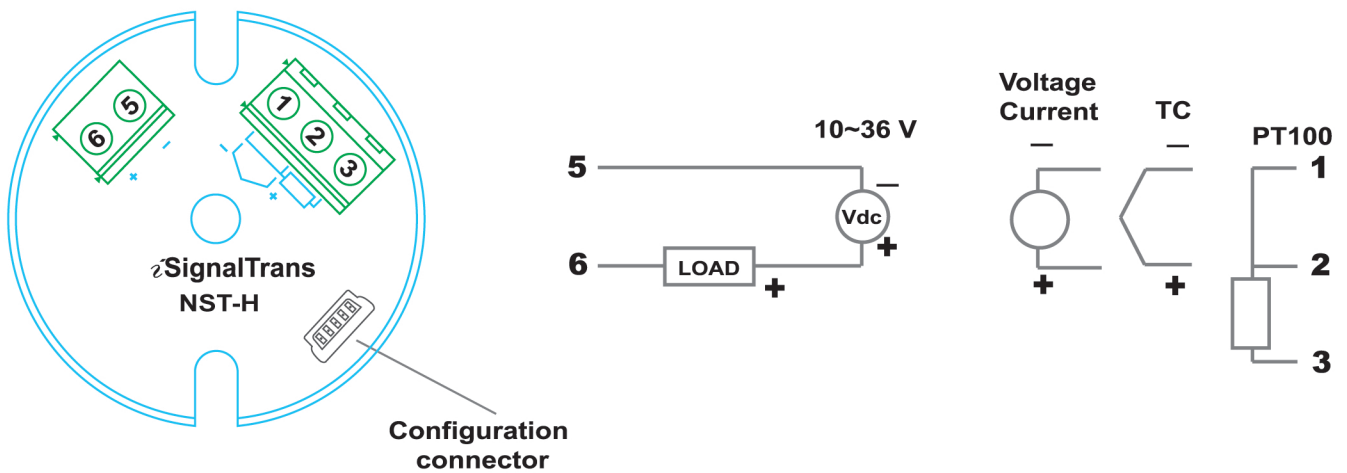


Ordering Information

NST-H

The unit will come standard with PT100, -200~600°C, you can change the input Type/Rang using the free software "zSignalwin®" with the configuration cable URC-1020, or you can contact us for non-standard Input/Rang setting.

【Accessory】

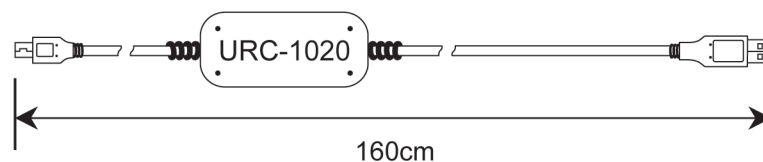

URC-1020 Interface Cable